NOTES:

- 1. HOLD ROUGH-IN DIMENSIONS ± 1/8" (3.2MM).
- 2. WHEN INSTALLING THIS UNIT, LOCAL, STATE, OR FEDERAL CODES SHOULD BE ADHERED TO. FOR INSTALLATION HEIGHTS OTHER THAN SHOWN, DIMENSIONS MARKED (*) MUST BE ADJUSTED ACCORDINGLY.
- 3. REFER TO 5874/VRK5874 OPERATION AND MAINTENANCE MANUAL FOR PUSH BUTTON AND VALVE INSTALLATION/MAINTENANCE INSTRUCTIONS.
- 4. ROUGH IN DIMENSIONS FOR FOUNTAIN HEIGHTS:

CHILD WHEELCHAIR HEIGHT: SEE SHT 2 FIG 1 WASTE: 26-1/4" (667mm)

SUPPLY: 26-1/8" (664mm) MOUNTING HOLE: 24-13/16" (630mm) FOUNTAIN: 24" (610mm) BUBBLER: 29-7/8" (756mm)

ADULT WHEELCHAIR HEIGHT: SEE SHT 2 FIG 2

WASTE: 29-1/4" (743mm) SUPPLY: 29-1/8" (740mm) MOUNTING HOLE: 27-13/16" (706mm)

FOUNTAIN: 27" (686mm) BUBBLER: 32-7/8" (832mm)


STANDING ADULT HEIGHT: SEE SHT 2 FIG 3


WASTE: 34-3/4" (883mm) SUPPLY: 34-5/8" (879mm) MOUNTING HOLE: 33-5/16" (846mm) FOUNTAIN: 32-1/5" (826mm) BUBBLER: 38-3/8" (972mm)

5 REFER TO MODEL 1117L INSTALLATION DRAWING SHEET 2 OF 2 (ON HAWS WEBSITE WWW.HAWSCO.COM) FOR PERMISSABLE BOWL MOUNTING PATTERNS. TWO WHEELCHAIR HEIGHT FOUNTAINS CANNOT BE MOUNTED SIDE BY SIDE PER ANSI A117.1.

MOUNTING PLATE

(STANDARD HAWS 6717)

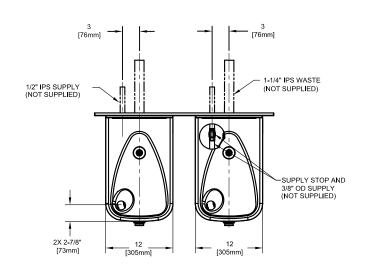



[13mm

(\$TRÄDGÅRDSTEKNIK


WEBSITE: WWW.HAWSCO.COM

PART MUMBER

DRAWING NO

15269A00

0002080223.D

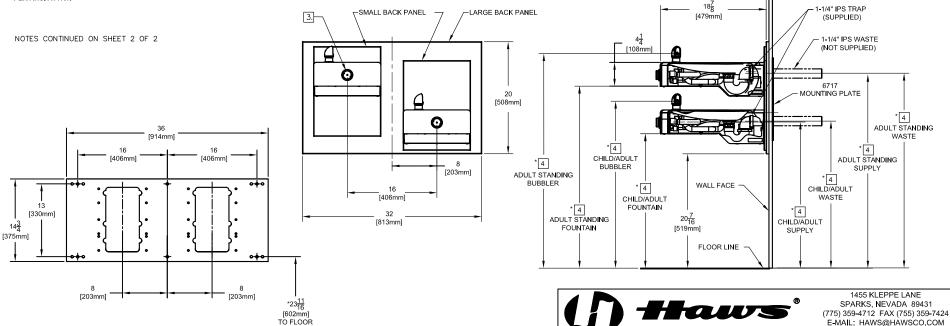

ECN NO. REVISED PER BY:

C FENNER 10/06

ECN: 4603 HM


MODEL(S)


1117L

NOTES:

- 6. FIGURES 1 AND 2 ARE REVERSIBLE. CAN BE RIGHT OR LEFT SIDE HIGH.
- 7. USE SHADED HOLES TO MOUNT AT INDICATED POSITIONS BASED ON COMBINATION SELECTED (FIGS. 1 THRU 3).
- 8. REFER TO SHEET 1 OF 2 NOTE 4. FOR INSTALLED FOUNTAIN DIMENSIONS.










FIGURE 1.
ADULT STANDING/CHILD WHEELCHAIR

6 FIGURE 2. ADULT STANDING/ADULT WHEELCHAIR

FIGURE 3.
ADULT STANDING/ADULT STANDING

BOWL MOUNTING PATTERNS

