

LM2400

**BARONNESS**

Quality on Demand

LM Series

**LM2400**

LIGHTWEIGHT FAIRWAY MOWER



BEVATTNINGSTEKNIK  
Helsingborgsvägen 578, Varalöv  
262 96 ÄNGELHOLM, SWEDEN

Telefon: +46 431 22250  
Email : [info@bevattningsteknik.se](mailto:info@bevattningsteknik.se) eller [philip@bevattningsteknik.se](mailto:philip@bevattningsteknik.se)  
[www.bevattningsteknik.se](http://www.bevattningsteknik.se)


## BARONESS LM2400

- Low centre of gravity
- The finest reel and bedknife in the industry
- Light weight (1300kg)
- outstanding cutting power
- Low ground pressure/high traction
- four-wheel drive



**Outstanding performance and serviceability**

**Low running costs and long service life**

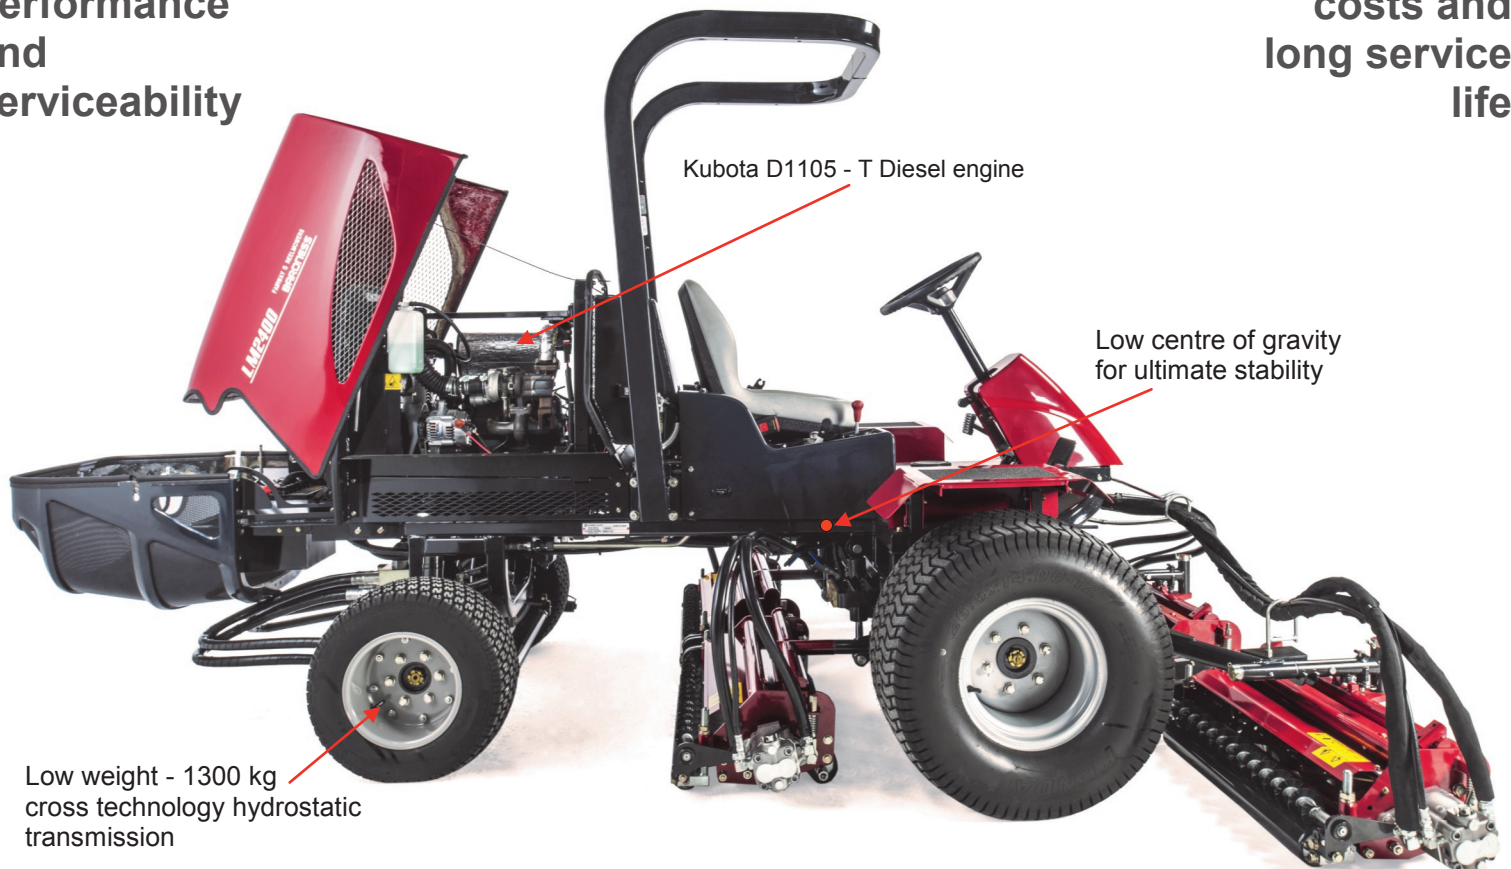

Kubota D1105 - T Diesel engine

Low centre of gravity for ultimate stability

Low weight - 1300 kg cross technology hydrostatic transmission




## BARONESS LM2400

**Safe..... And kind to the turf!**


Low centre of gravity minimises weight transfer on sloping terrain and optimises traction capability

Utilising the Baroness cross technology hydrostatic drive system, the LM2400 combines the turning abilities of a parallel circuit design with the climbing capabilities of a series circuit.

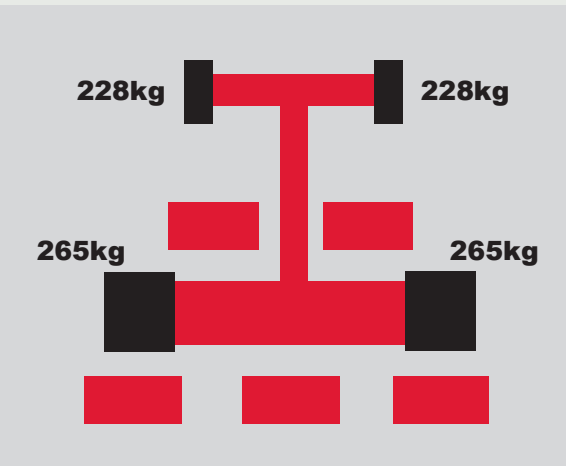


**Optimum cutting performance!**

With the shortest possible distance between the rear cutting units and the front units there is no uneven cutting when turning and no loss of overlap on sloping terrain

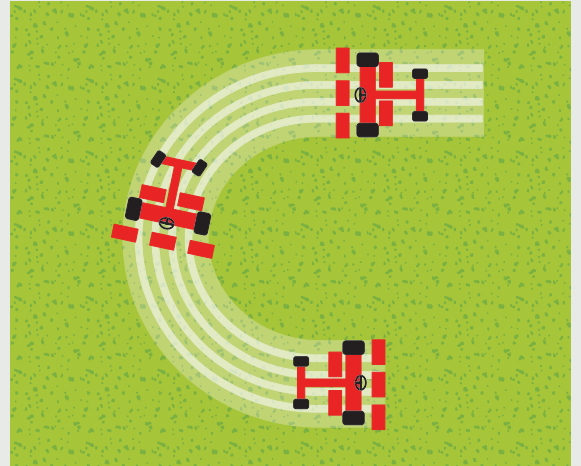

**Optimum Quality of Cut!**

Optimum weight distribution, low weight, maximum overlap and minimum distance between cutting units - all elements that combine with our finest cutting cylinder and bedknife technology to produce an outstanding cutting finish in the toughest of conditions.

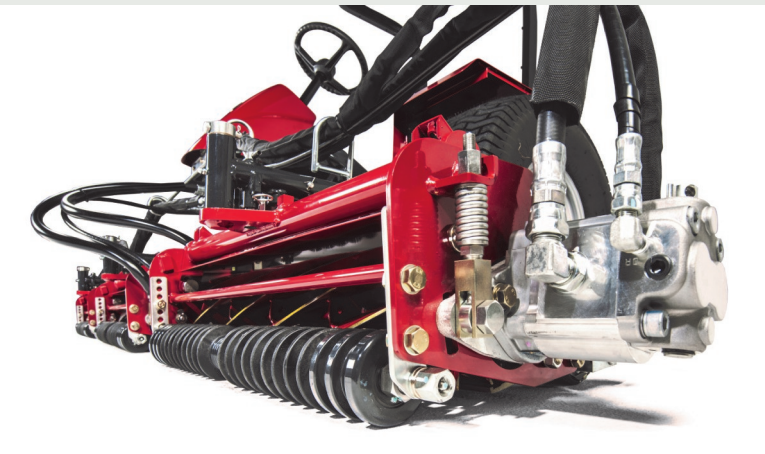

# BARONESS

Specification	BARONESS LM2400
Total Length	303cm
Working width	318cm
Transport width	226cm
Height	135cm (to steering wheel)
Weight	1300 kg
Minimum turning radius	290cm
Engine	Kubota D1105-T (Diesel turbo) 4 – cycle liquid cooled, 3 cylinder diesel engine 1.123 litre displacement Maximum output 24.5 kW (33.3PS) @ 3000 rpm* Fuel tank capacity 38 litres
Speed - forwards reverse	0 – 16 km/h 0 – 8.0 km/h
Drive system	Hydrostatic full time 4-wheel drive
Cutting width	277cm
Cutting height	10 – 60 mm
Cutting cylinder diameter	163mm
Cutting cylinder – no. of blades	9
Work rate	22160 m <sup>2</sup> /h
Slope rating	15 degrees maximum
Tyre size - front	26.5 x 14.00 – 12
Tyre size - rear	20 x 10.00 – 10

\*Maximum engine speed, factory setting = 3100 rpm  
Specifications may be subject to change without notice.

# BARONESS

Quality on Demand

**Postadress:**

TRÄDGÅRDSTEKNIK AB  
Helsingborgsvägen 578, Varalöv  
262 96 ÄNGELHOLM

Telefon : 0431-222 90  
Bg.nr : 5743-7980  
Org.nr : 556409-6120

**URL:**

[www.tradgardsteknik.se](http://www.tradgardsteknik.se)  
E-postadress:  
[info@tradgardsteknik.se](mailto:info@tradgardsteknik.se)