


NIBE F1145-10



55 °C

35 °C



A++

A+++



42 dB




dB

■ 12
■ **12**
■ 12
kW


■ 13
■ **13**
■ 13
kW



NIBE F1145-10 + VPB300

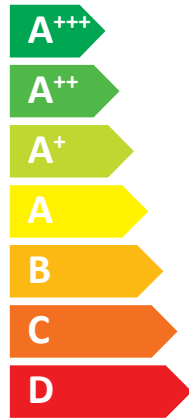

A⁺⁺

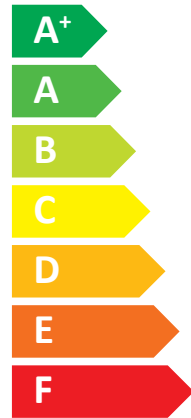

A

42 dB

dB




- 12 kW
- 12 kW
- 12kW

TRÄDGÅRDSTEKNIK

NIBE F1145-10 + VPB300



+



+



+



+



Model:	NIBE F1145-10 + VPB300		
Temperature application	35	55	°C
Declared load profile for water heating	XXL		
Seasonal space heating energy efficiency class, average climate:	A+++	A++	
Water heating energy efficiency class, average climate:	A		
Rated heat output, average climate:	13	12	kW
Annual energy consumption for space heating, average climate	5466	6347	kWh
Annual electricity consumption for water heating, average climate	1945		kWh
Seasonal space heating energy efficiency, average climate:	184	144	%
Water heating energy efficiency, average climate:	111		%
Sound power level LWA indoors	42		dB
Rated heat output, cold climate:	13	12	kW
Rated heat output, warm climate:	13	12	kW
Annual energy consumption for space heating, cold climate	6351	7269	kWh
Annual electricity consumption for water heating, cold climate	1945		kWh
Annual energy consumption for space heating, warm climate	3655	4236	kWh
Annual electricity consumption for water heating, warm climate	1945		kWh
Seasonal space heating energy efficiency, cold climate:	189	149	%
Water heating energy efficiency, cold climate:	111		%
Seasonal space heating energy efficiency, warm climate:	182	143	%
Water heating energy efficiency, warm climate:	111		%
Sound power level LWA outdoors			dB

Data for package fiche

Controller class	VII		
Controler contribution to efficiency	3,5		%
Seasonal space heating energy efficiency of package, average climate:	188	148	%
Seasonal space heating energy efficiency class for package, average climate:	A+++	A++	%
Seasonal space heating energy efficiency of package, cold climate:	193	153	%
Seasonal space heating energy efficiency of package, warm climate:	186	147	%



TRÄDGÅRDSTEKNIK

Model(s):		NIBE F1145-10 + VPB300					
Type of heat source/sink:		Brine-to-water					
Low-temperature heat pump:		No					
Equipped with supplementary heater:		Yes					
Heat pump combination heater:		Yes					
Climate condition:		Average					
Temperature application:		Medium temperature (55 °C)					
Applied standards: EN14825, EN16147 and EN12102							
Rated heat output	Prated	11,70	kW	Seasonal space heating energy efficiency	η_s	144	%
<i>Declared capacity for part load at outdoor temperature Tj</i>				<i>Declared coefficient of performance for part load at outdoor temperature Tj</i>			
Tj = -7 °C	Pdh	9,3	kW	Tj = -7 °C	COPd	3,25	kW
Tj = +2 °C	Pdh	9,7	kW	Tj = +2 °C	COPd	3,85	kW
Tj = +7 °C	Pdh	9,9	kW	Tj = +7 °C	COPd	4,23	kW
Tj = +12 °C	Pdh	10,1	kW	Tj = +12 °C	COPd	4,65	kW
Tj = biv	Pdh	9,4	kW	Tj = biv	COPd	3,42	kW
Tj = TOL	Pdh	9,2	kW	Tj = TOL	COPd	3,03	kW
Tj = -15 °C (if TOL < -20 °C)	Pdh		kW	Tj = -15 °C (if TOL < -20 °C)	COPd		kW
Bivalent temperature	T _{biv}	-5	°C	Operation limit temperature	TOL	-10	°C
Cycling interval capacity for heating	P _{cyh}		kW	Cycling interval efficiency	COP _{cyh}		
Degradation co-efficient	Cdh	1,00		Heating water operating limit	WTOL	65	°C
<i>Power consumption in modes other than active mode</i>				<i>Supplementary heater</i>			
Off mode	P _{OFF}	0,002	kW	Rated heat output	P _{sup}	2,5	kW
Thermostat-off mode	P _{TO}	0	kW	Type of energy input	Electric		
Standby mode	P _{SB}	0,007	kW				
Crankcase heater mode	P _{CK}	0,014	kW				
<i>Other items</i>							
Capacity control	fixed			Rated air flow rate, outdoors			m ³ /h
Sound power level, indoors/outdoors	L _{WA}	42/-	dB	Rated water flow rate, indoor heat exchanger		1,01	m ³ /h
Annual energy consumption	Q _{HE}	6347	kWh	Rated brine or water flow rate, outdoor heat exchanger		1,80	m ³ /h
<i>For heat pump combination heater:</i>							
Declared load profile	XXL			Water heating energy efficiency	η_{wh}	111	%
Daily electricity consumption	Q _{elec}	8,86	kWh	Daily fuel consumption	Q _{uel}		kWh
Annual electricity consumption	AEC	1945	kWh	Annual fuel consumption	AFC		GJ

Postadress:

TRÄDGÅRDSTEKNIK AB
Helsingborgsvägen 578, Varalöv
262 96 ÄNGELHOLM

Telefon : 0431-222 90
Bg.nr : 5743-7980
Org.nr : 556409-6120

URL:

www.tradgardsteknik.se
E-postadress:
info@tradgardsteknik.se